

## AUTOMATIC ROLLER IRONER WITH ROLLER SPEED CONTROL, Ø 250X1400 MM S-140/25 V

Ref: 0912.12.017  
Grandimpianti

Specially-processed aluminum basin that ensures long life and energy conservation.

Roller supported by bearings.

Front loader use: The ironer can be installed against a wall.

Finger safety band protects the user in case of mismanouver.

Electronic control unit that monitor all machine running parameters and optimizes performance and energy consumption.

Safety thermostat avoids undesirable overheating.

Wide pedal for press movement control.


Manual device for lifting the basin in power down events.

Automatic press operation.

V = Roller speed control.

AV = Roller speed control + vacuum + Nomex fabric.

AVL = Roller speed control + vacuum + Nomex fabric and Maxpress coating.

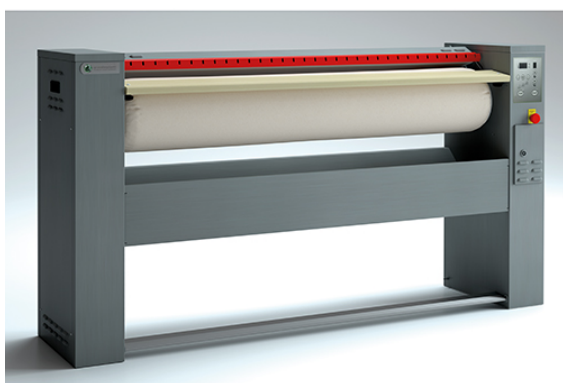

### FEATURES

Dimensions (WDH)	1800x420x1005 mm
Total power	7.18 kW
Heating power	7 kW
Power supply	400V/3/50 Hz
Capacity (H.R. 10-15%); (H.R. 20-25%)	40 kg/h; 25/30 kg/h
Roller	Ø 250x1400 mm
Speed roller	2 - 4 m/min
Net weight	126 kg
Packaging dimensions	1900x500x1190 mm
Gross weight	145 kg