


**AUTOMATIC ROLLER IRONER WITH ROLLER SPEED CONTROL + VACUUM + NOMEX FABRIC, Ø 300X1600 MM S-160/30 AV**

Ref: 0912.12.012  
 Grandimpianti

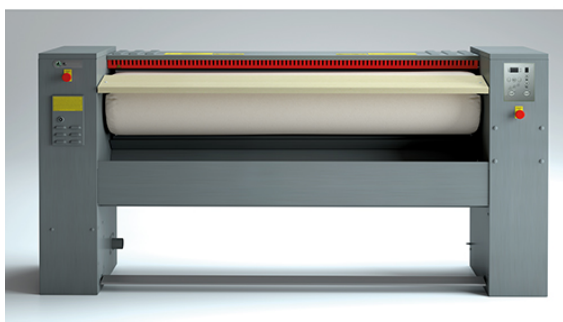

Specially-processed aluminum basin that ensures long life and energy conservation.

Roller supported by bearings.

Front loader use: The ironer can be installed against a wall.

Finger safety band protects the user in case of mismanouver.

Electronic control unit that monitor all machine running parameters and optimizes performance and energy consumption.

Safety thermostat avoids undesirable overheating.

Wide pedal for press movement control.

Manual device for lifting the basin in power down events.

Automatic press operation.

V = Roller speed control.

AV = Roller speed control + vacuum + Nomex fabric.

AVL = Roller speed control + vacuum + Nomex fabric and Maxpress coating.

FEATURES

|                                       |                        |
|---------------------------------------|------------------------|
| Dimensions (WDH)                      | 2200x500x1100 mm       |
| Total power                           | 13.86 kW               |
| Heating power                         | 13.2 kW                |
| Power supply                          | 400V/3/50 Hz           |
| Capacity (H.R. 10-15%); (H.R. 20-25%) | 32/50 kg/h; 26/37 kg/h |
| Roller                                | Ø 300x1600 mm          |
| Speed roller                          | 2 - 4 m/min            |
| Air consumption                       | 200 m3/h               |
| Flue outlet                           | 55 mm                  |

Net weight 262 kg

---

Gross weight 250 kg

---